
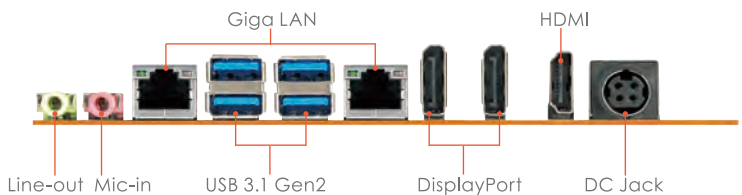
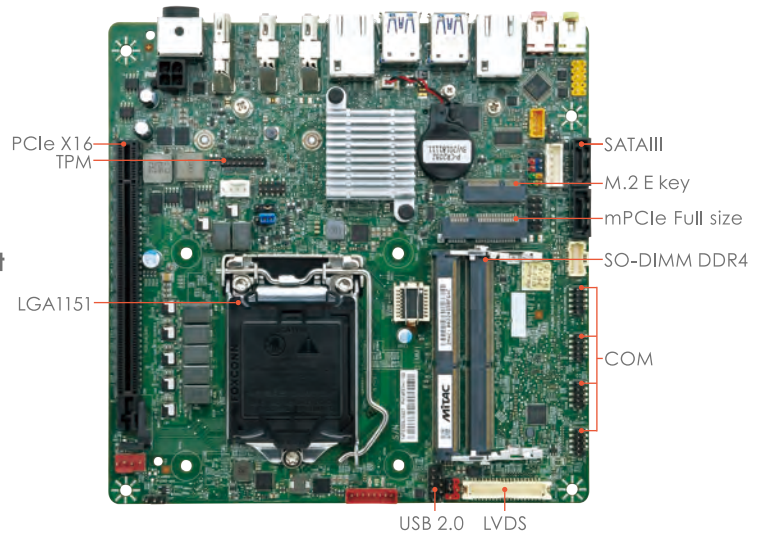


PH14FEI


Thin Mini-ITX Form Factor
Intel® Coffee Lake Processor with H310/Q370 Chipset

Features


- Up to Intel® Coffee Lake-R 9th i9 35W & 8th i7 95W(6cores) LGA processor
- Intel® H310/Q370 Chipset
- Intel® vPro technology support (Q370)
- 2 x DDR4 SO-DIMM up to 32GB
- 5 phase power design
- Support triple display for HDMI, DisplayPort and LVDS/eDP
- 1 x M.2 M 2280, 1 x M.2 E 2230, 1 x mPCIe Full size, 1 x PCIe X16
- 2 x Intel® Gigabit Ethernet
- DC-in 12V (Optional: 12~24V SKU)

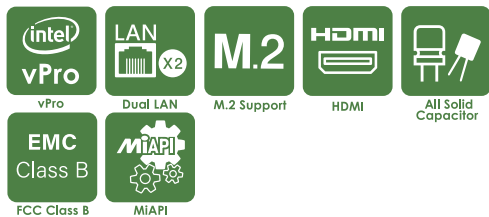


Block Diagram

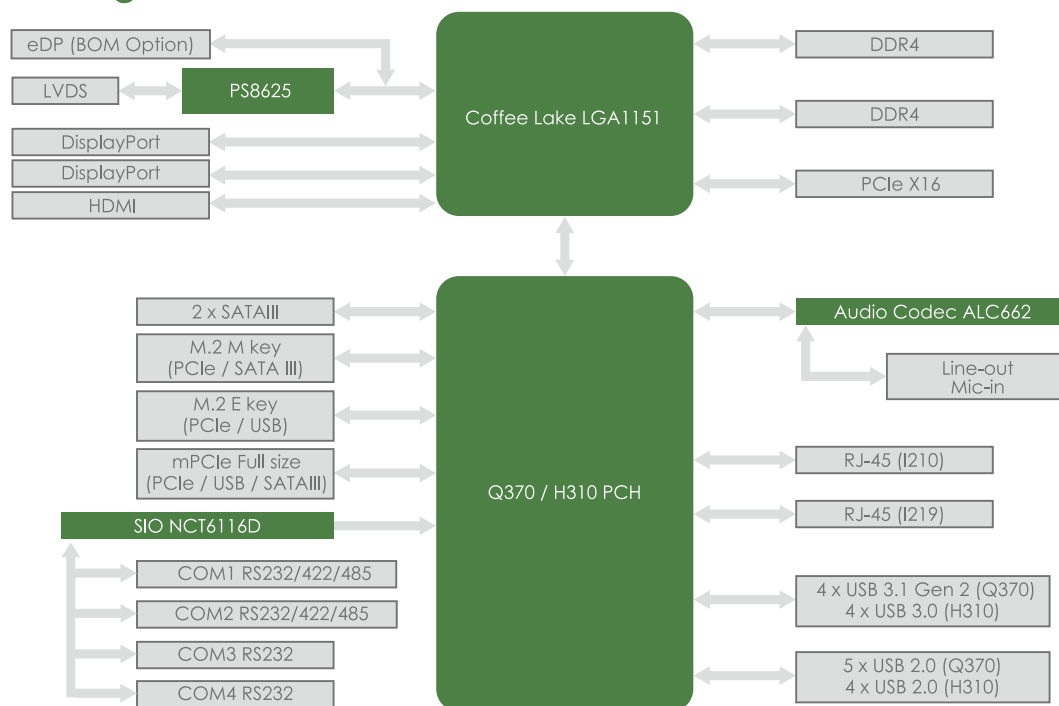

PH14FEI-XXXX-12V(Output)



PH14FEI-XXXX-24V(Output)



Power Ordering Information

MiTAC PN	Description
442110000147	12V 180W adapter for PH14FEI-XXXX-12V
442110000151	24V 120W adapter (for 35W CPU only) for PH14FEI-XXXX-24V
442110000149	24V 220W adapter for PH14FEI-XXXX-24V

PH14FEI Mini-ITX

MECHANICAL	
Form Factor	Mini-ITX: 6.7" x 6.7" (170mm x 170mm)
SYSTEM	
Processor	9th & 8th Gen Intel® Coffee Lake LGA1151 Socket Processor, Core i7/i5/i3 6-core TDP Max. 95W, Core i9 8-core TDP Max 35W
Chipset	Intel® Q370 (Support RAID 0 / 1) support vPro / Intel H310
Memory	DDR4 2666MHz, 2 x 260-pin SO-DIMM, Max. 32GB (Non-ECC)
Graphics	Intel® HD Graphics
Ethernet	Intel® I219-LM Giga LAN + Intel® I210-AT Giga LAN
Audio	Realtek® ALC662
I/O Chipset	Nuvoton NCT6116D
TPM	TPM Header (option TPM-SPI-NPCT750)
Expansion Slot	1 x PCIe X16 slot 1 x Mini PCIe Full size (SATA, USB, PCIe) 1 x M.2 2260 / 2280 M key (PCIe, SATA) * H310 only supports M.2 SATA SSD 1 x M.2 2230 E key (PCIe, USB 2.0)
BIOS	AMI BIOS, 256 Mbit SPI
H / W Monitor	Temperature Monitor, Voltage Monitor, Fan Monitor
Watchdog Timer	1~255 Steps by Software Program
Smart Fan Control	CPU Fan / System Fan
GRAPHICS	
VGA	—
DVI	—
HDMI	Up to 4K (4096 x 2160) @30 Hz
DisplayPort	Up to 4K (4096 x 2304) @60 Hz
2nd DisplayPort	Up to 4K (4096 x 2304) @60 Hz
LVDS	Up to 1920 x 1200 @60 Hz
eDP (Option)	Up to 4K (4096 x 2304) @60 Hz
REAR I/O	
USB	4 x USB 3.1 Gen. 2 (10Gb/s) (Q370) / 4 x USB 3.0 (H310)
Display I/O	1 x HDMI 1.4, 2 x DisplayPort 1.2
Audio I/O	1 x Mic-in, 1 x Line-out
LAN I/O	2 x RJ-45
Serial Port	—
PS/2 Port	—
Others	1 x DIN 4-pin DC Jack
INTERNAL CONNECTORS	
Storage	2 x SATAIII
USB	5 x USB 2.0 (Q370) , 4 x USB 2.0 (H310)
Display I/O	1 x LVDS (Optional eDP SKU available) 1 x Backlight Connector
Audio I/O	1 x Speaker 2W
Serial Port	4 x RS232 (two supports RS232/422/485 select by BIOS)
PS/2 Port	—
Parallel Port	—
GPIO	1 x MiAPI Header (Programmable)
Fan	1 x 4-pin CPU Fan Connector, 1 x 4-pin System Fan Connector
Power	1 x ATX 4-pin Power Connector, 1 x AT / ATX Mode Select Jumper
Others	1 x Front Audio Header (Mic-in / Line-out), 1 x CMOS Jumper, 1 x panel power select header, 1 x backlight power select header, 1x buzzer header
POWER REQUIREMENT	
Power Input	DC-in 12V DIN 4-pin connector / ATX 4pin 12V *optional 12V-24V SKU
ENVIRONMENTAL	
Operating Temperature	0 ~ 60°C (32 ~140°F)
Storage Temperature	-40 ~ 85°C (-40 ~185°F)
Operating Humidity	10% ~ 95% R/H, non-condensing
Certification	CE & FCC Class B
OS	
OS Support	Windows® 10 64-bit Linux (support by request)

Ordering Information

Model Number	Chipset	DisplayPort / HDMI	LVDS / eDP	USB 3.1 / 2.0	Line-out / Mic-in	RS-232 LAN	M.2 2230 E key / M.2 2280 M key	mPCIe Full size	PCIe X16	Power
PH14FEI-H310-12V	Intel® H310	1 / 1	1 / 0	4 / 4	1 / 1	4 2	1 / 1	1	1	DC-in 12V
PH14FEI-Q370-12V	Intel® Q370	2 / 1	1 / 0	4 / 5	1 / 1	4 2	1 / 1	1	1	DC-in 12V
PH14FEI-H310-24V	Intel® H310	1 / 1	1 / 0	4 / 4	1 / 1	4 2	1 / 1	1	1	DC-in 12~24V

Optional Peripheral

Model Number	TPM-SPI-NPCT750	Description	Nuvoton NPCT750 TPM2.0
--------------	-----------------	-------------	------------------------

Packing List

Packing		
• 1 x Motherboard	• 1 x 50cm SATA Cable	• 2 x I/O Bracket (Half and Full Height)